


NOTES:

- 1. CONCRETE SHALL BE IDOT CLASS ST
- 2. MINIMUM SIDEWALK THICKNESS SHALL BE 4" (100mm)
- SIDEWALK THICKNESS ACROSS DRIVEWAY SHALL BE AT A MINIMUM 6" (150mm FOR RESIDENTIAL DRIVEWAYS AND 8" (200mm) FOR COMMERCIAL DRIVEWAYS
- 4. MAXIMUM LONGITUDINAL SLOPE SHALL NOT EXCEED 52 (20:1), FOR ANY SLOPE IN EXCESS OF 52, ALL REQUIREMENTS OF THE ILLINOIS ACCESSIBILITY CODE (LATEST EDITION) SHALL BE MET.
- 5. MINIMUM TRANSVERSE SLOPE SHALL BE 1/4" PER 1' (2%) MAXIMUM TRANSVERSE SLOPE SHALL BE 1/2" PER 1' (4%).
- 6. A MINIMUM 2" (50mm) AGGREGATE SUBBASE (CA-6) SHALL BE PROVIDED. (4" (100mm) THROUGH COMMERCIAL DRIVEWAYS).
- 7. AGGREGATE SUBBASE SHALL BE MECHANICALLY COMPACTED.
- 8. ALL SIDEWALKS SHALL BE PROMPTLY BACKFILLED AND PROTECTED FROM


SIDEWALK	CITY	OF	NAP	ERVILLE	STAN	DARD	DETAIL
Approved By:	DATE:	6/8	/98	REV:		Detai	
	SCALE	NT				P	VMT 8





- . SNOW FENCE SHALL EXTEND TO THE DRIPLINE OF THE TREE, THE SNOW FENCE SHALL BE HIGH ENOUGH SO AS TO BE VISIBLE TO ALL CONSTRUCTION PERSONNEL. GRADE CHANGES, UTILITY TRENCHES, STORAGE OF CONSTRUCTION MATERIAL, DUMPING OF WASTE OR STORAGE OF CONSTRUCTION EQUIPMENT SHALL NOT BE ALLOWED WITHIN SNOW
- . IF A UTILITY MUST BE WITHIN 15'(4.57M) OF A TREE TRUNK, IT IS RECOMMENDED THAT IT
- S. IF A UTILITY WIST DE MANUEL AS A UTILITY WITHIN THE DRIPLINE SHOULD BE SELECTIVELY THINNED TO CONSTRUCTION ACTIVITY WITHIN THE DRIPLINE SHOULD BE SELECTIVELY THINNED TO BY AN ARBORIST SKILLED AT THE SELECTIVE THINNING PROCEDURE. NONE OF THE TREES SHALL BE TOPPED, HEADED BACK, SKINNED (REMOVAL OF THE INTERIOR BRANCHES), OR CLIMBED WITH SPIKES, ALL DEAD WOOD TRANSPORTED TO A VADIO WARDEN.
- SKINNED TREMOVAL OF THE INTERTOR BRANCHESS, OR CLIMBED WITH SPIKES, ALL DEAD WOOD SHOULD BE REMOVED TO AVOID HAZARD.

 IT IS RECOMMENDED THAT FOLLOWING CONSTRUCTION, TREES BE MAINTAINED IN THEIR NATIVE CONDITION. NO LAWN SHOULD BE PLACED AROUND THE TREES. IT IS RECOMMENDED THAT THE AREA BE MULCHED WITH 2"(SOMM) OF DECOMPOSED LEAVES AND 2"(SOMM) OF WOOD CHIPS OR BARK.

Title: RECOMMENDED PRACTICES FOR TREES TO BE SAVED	CITY OF NAPERVILLE STANDARD DETA
Approved By:	DATE: 9/29/98 REV: Detail:
	SCALE: NTS MISC 7

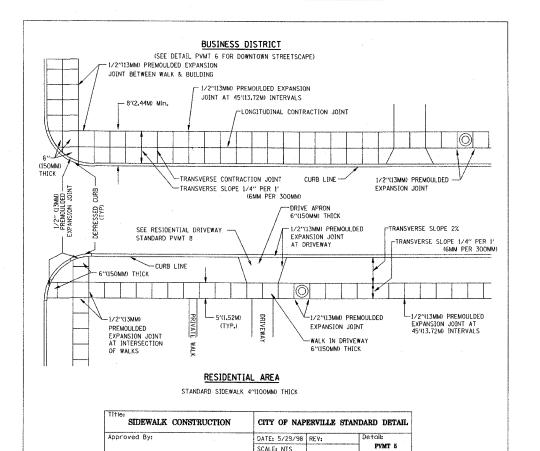

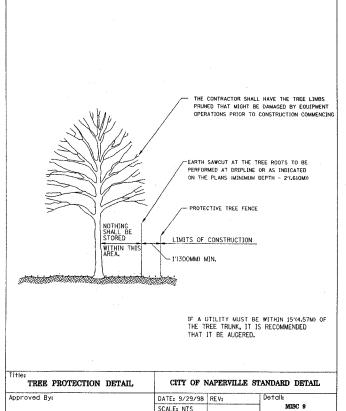

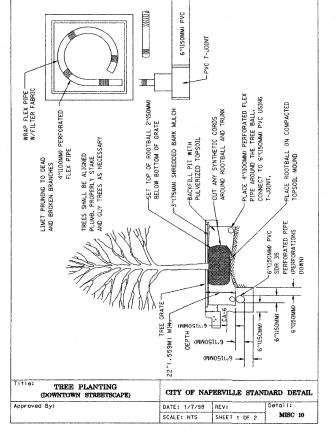



CONTRACT 83664

